

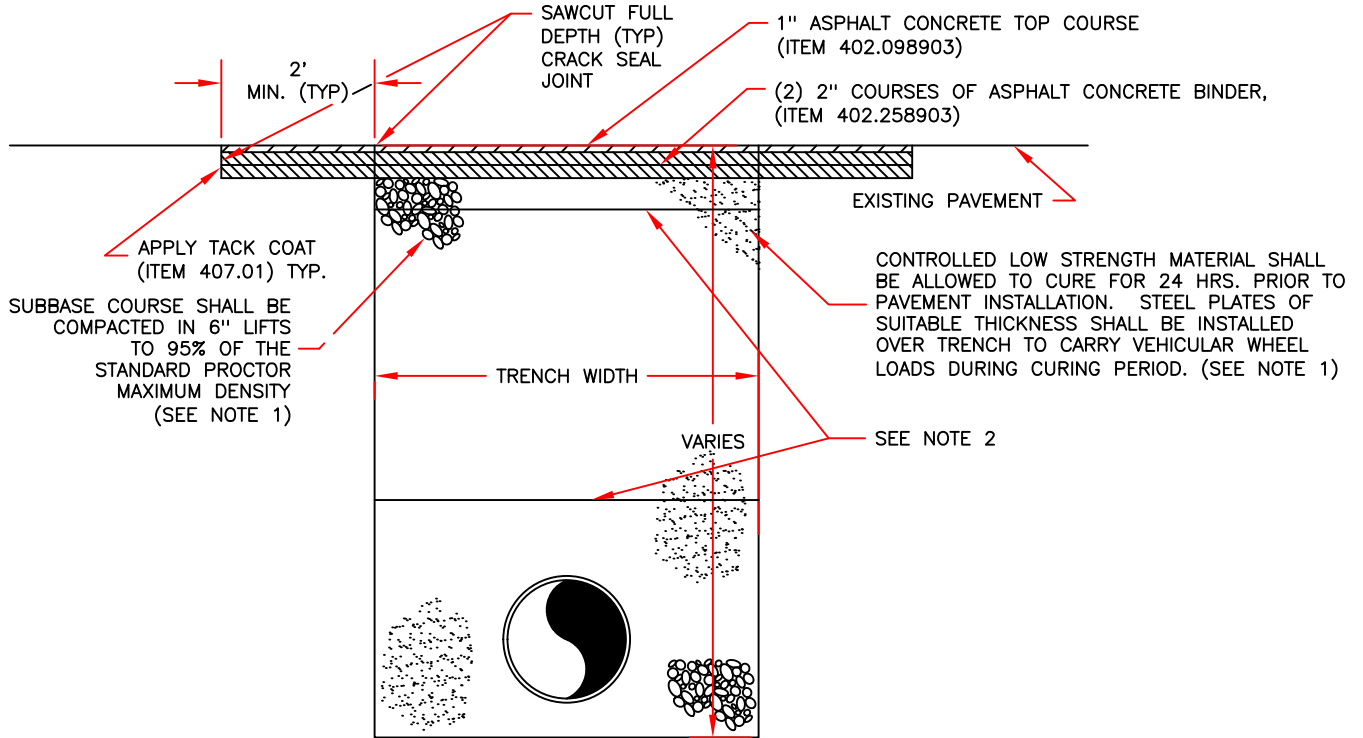


FED. ROAD REG. NO.	STATE	CONTRACT NO.	SHEET NO.	TOTAL SHEETS
			1	1
LOCATION:				
TOWN:				
COUNTY: HERKIMER				
P.I.N.				
B.I.N.				

LEGEND

- SUBBASE COURSE (ITEM 304.12) 
- CONTROLLED LOW STRENGTH MATERIAL (ITEM 204.01) 



NOTES:

- 1.. BACKFILL TRENCH WITH SUBBASE COURSE TYPE 2 (ITEM 304.12) OR CONTROLLED LOW STRENGTH MATERIAL (ITEM 204.01) AS DETERMINED BY HIGHWAY DEPARTMENT FOR FULL TRENCH WIDTH.
2. TRENCH MAY BE BACKFILLED WITH EXCAVATED MATERIAL IF DETERMINED TO BE ACCEPTABLE BY THE HIGHWAY DEPARTMENT WITHIN THE FOLLOWING LIMITS: 1 FOOT ABOVE CROWN OF PIPE TO 10 INCHES BELOW ROADWAY SURFACE. THE REMAINDER OF THE TRENCH SHALL BE BACKFILLED WITH ITEM 304.12 AND ASPHALT CONCRETE PAVEMENT AS INDICATED ABOVE. BACKFILL MATERIAL SHALL BE COMPACTED IN 6" LIFTS.
3. ALL MATERIALS USED IN CONSTRUCTION SHALL COMPLY WITH THE "NEW YORK STATE STANDARD SPECIFICATIONS (US CUSTOMERY)" AND ALL ADDENDA TO DATE.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTENANCE OF TRAFFIC IN ACCORDANCE WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS & HIGHWAYS AND THE NEW YORK STATE SUPPLEMENT TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS (LATEST EDITIONS).
5. REFER TO NYSDOT STANDARD SPECIFICATIONS (LATERST EDDITION) FOR MATERIALS AND SPECIFICATIONS REFERENCED ON DETAIL.

ASPHALT PAVEMENT RESTORATION DETAIL

NOT TO SCALE

HIGHWAY RESTORATION DETAIL

HERKIMER COUNTY
HIGHWAY DEPARTMENT

PROJECT NO.	SCALE:	DATE:
-	NONE	NOVEMBER 2017